

Safety Information

- Blanking plugs **MUST BE** used when high voltage output is not required (i.e 3 outputs, 1 blanking plug)
- Power supply **MUST BE** earthed on the external Earth Stud
- 24V input **MUST BE** disconnected before connecting/disconnecting Outputs or Fittings

Meech

Meech International
2 Network Point
Range Road, Witley
OX28 0YN, UK
Tel: +44 (0) 1993 776700
Fax: +44 (0) 1993 776777
email: sales@meech.com
web: www.meech.com

COPYRIGHT © MEECH STATIC ELIMINATORS
THIS DOCUMENT AND THE INFORMATION
THEREIN IS THE PROPERTY OF THE MEECH
GROUP AND SHOULD NOT BE COPIED IN WHOLE
OR PART OR USED FOR MANUFACTURE OR
OTHERWISE DISCLOSED WITHOUT THE PRIOR
WRITTEN CONSENT OF MEECH INTERNATIONAL

TITLE: 994 Compact Generator
Socket version

DRAWING No:
A994CG-SOCKET-01

MATERIAL: Various

FINISH: Various

TOLERANCE UNLESS OTHERWISE SPECIFIED	DIMENSIONS IN MM
Machined Work Metric ±0.1mm	DO NOT SCALE
Unmachined Fabrications ±1mm	CRITICAL TO FUNCTION
Angular ±0.30°	(CTF) DIMENSIONS AS MARKED

PROJECTION	Sheet	Scale
1st Angle	A3	





Date:	Drawn by:
19/08/2016	David.Hyde

REVISION:

SHEET: 1 / 1

STATUS:

SIGNED OFF:

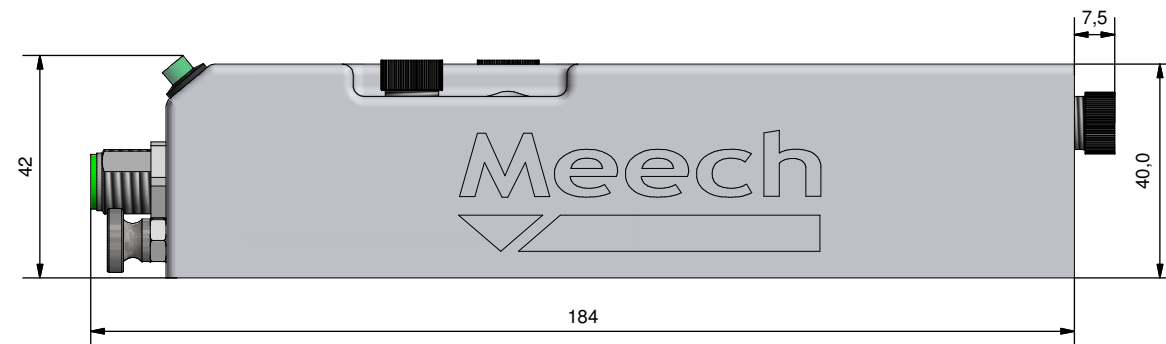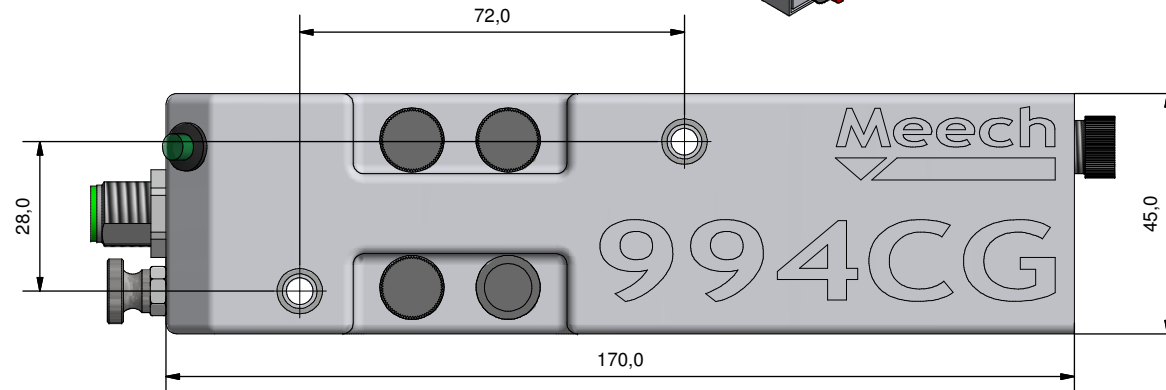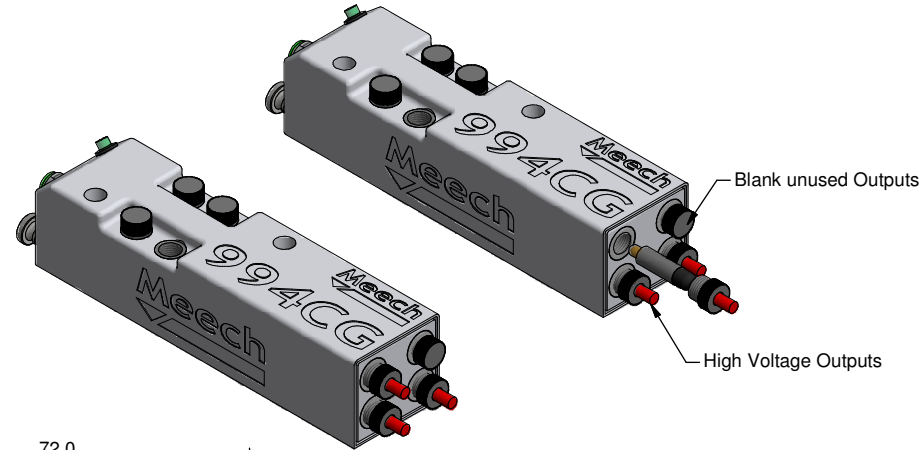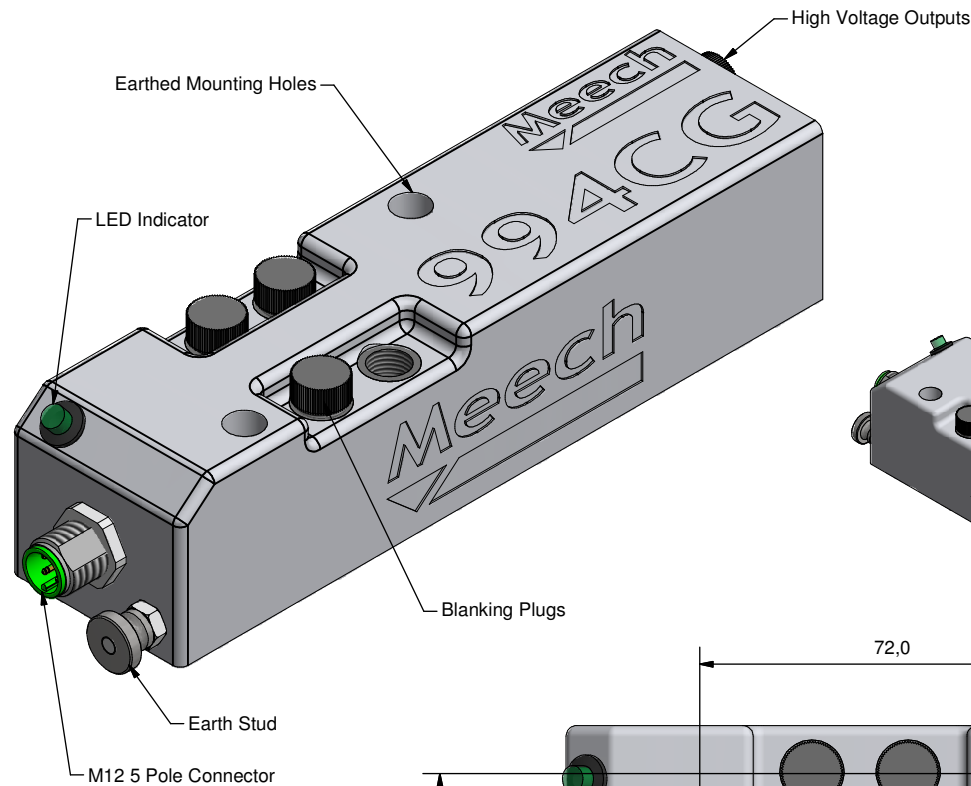

LED Key

- Solid Green - 994CG Powered Up
- Flashing Green - High Voltage On
- Solid Red - Alarm

Wiring Key

Pin Wire Colour

- 3 Blue - Earth
- 1 Brown - 24V Input
- 2 White - HT OK. 24V if output > 80%
- 4 Black - ON/OFF (Grounded for OFF)
- 5 Grey - 4-20mA Input signal

